

MGS12i

GPS Splitter



- Design For Wireless Infrastructure Applications
- Gain 0dB, 21dB And Passive Version Available
- Output port power at the same time intelligent selection of high voltage power supply.
- Response For
 - GPS:L1,L2,L2C,L5;
 - Glonass:G1,G2;
 - Galileo:L1,E1,E2,E5(E5a,E5b),E6;
 - Beidou2:B1,B2,B3;
 - IRNSS:L1,L5;
 - OmniStar
- High Isolations > 28dB

GEMS NAVIGATION Electronics Co.,Ltd.

Floor 2, building 6, rundongsheng Industrial Zone, Longzhu community, Xixiang

street, Bao'an District, Shenzhen China

Tel: +86-755-29644311

Fax: +86-755-29644383

Email: sales@gemsnav.com

Document Number 120240 Rev 002 2018-07-20 Page 1 / 5

Description

The MGS12i is a GPS device with one end input and two end outputs, which usually divides the received signal from the active GPS receiving antenna into two outputs for GPS receiving equipment.

Both outputs of the MGS12i are powered on at the same time. The power divider internally selects the port for powering the active GPS antenna by comparing the voltages.

When the voltage values of the two output ports are different, the higher voltage port will be used to supply power to the active GPS antenna. The other port will have a 200 Ohm DC load to simulate any receiver antenna connected to this port DC loss.

When the two output ports have the same voltage value, the J1 port is used by default for power supply. The J2 port will have a 200 Ohm DC load.

Specifications

Electrical Specifications, Operating Temperature -40 to 85°C


| Parameter | Conditions | Min | Type | Max | Units |
|---------------------------|--|------|-------|-------|-------|
| Freq. Range | Ant – Any Port, Unused Ports -50Ω | 1164 | | 1616 | MHz |
| Gain | Ant-Any Port, Unused Ports-50 (Gain may be specified by the customer) | 4 | 5 | 6 | dB |
| Input/output VSWR | All Ports 50Ω | | 1.5:1 | 2.0:1 | - |
| Noise Figure- Amplified | Ant-Any Port, Unused Ports-50Ω Gain=20dB | | | 3.0 | dB |
| Amp. Balance | IJ1-J2I, Ant-Any Port, Unused Ports-50Ω | | | 3 | dB |
| Isolation -Amp/Pass(Norm) | Adjacent Ports: Ant - 50Ω | 0 | | | dB |
| -Amplified (Hi Iso.) | Adjacent Ports: Ant - 50Ω | 25 | | | |
| DC IN | DC Input on any RF Output | 3 | | 9 | VDC |
| Device Current | Current Consumption of Active device, excluded Ant. Cur. | | 18 | 20 | mA |
| Current | Pass DC. No Powered configuration, DC input on J1 | | | 250 | mA |


Data Performance

| | VSWR(1575.42MHz) | Gain 0dB(1575.42MHz) |
|------|------------------|----------------------|
| IN | 1.16 | |
| OUT1 | 1.10 | 0.04dB |
| OUT2 | 1.08 | -0.22dB |

Output port power supply (V)

| | | | | | | | | |
|------|------|------|------|------|------|------|------|------|
| OUT1 | 5.00 | 6.00 | 5.00 | 6.00 | 4.00 | 5.00 | 5.00 | 0.00 |
| OUT2 | 5.00 | 6.00 | 6.00 | 5.00 | 5.00 | 4.00 | 0.00 | 5.00 |
| IN | 4.81 | 5.78 | 5.85 | 5.75 | 4.91 | 4.75 | 4.71 | 4.70 |

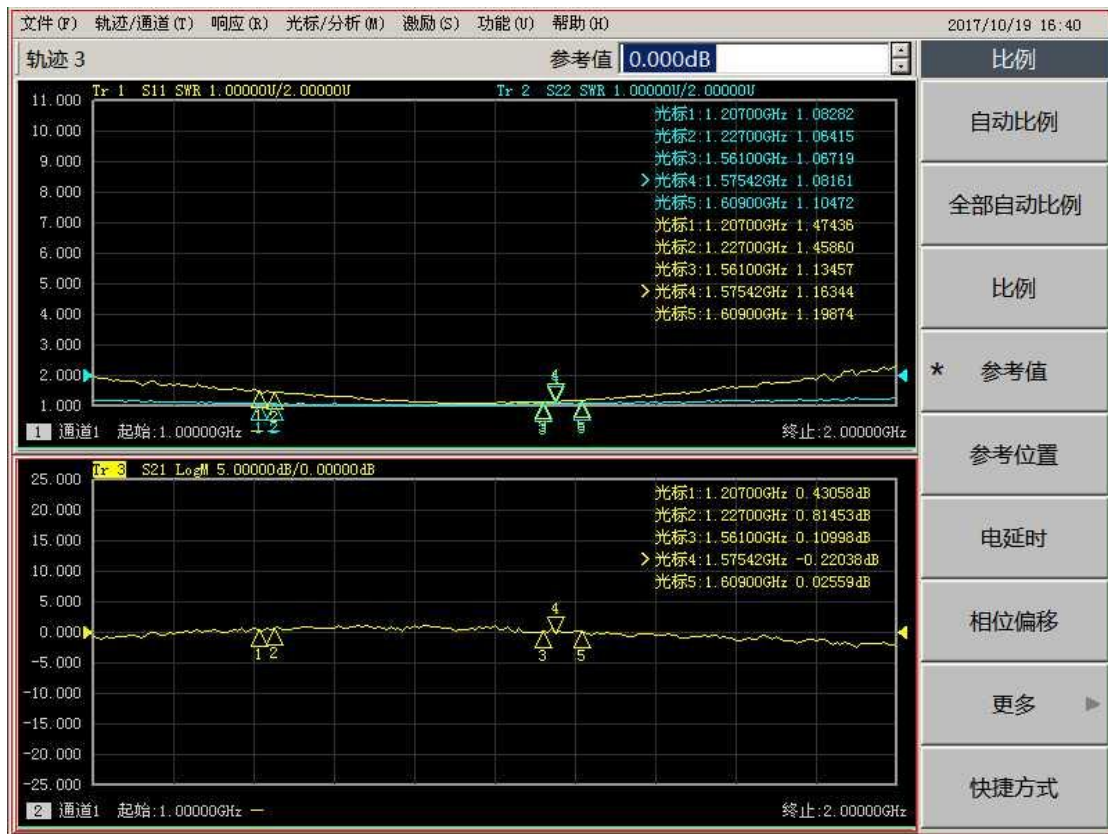

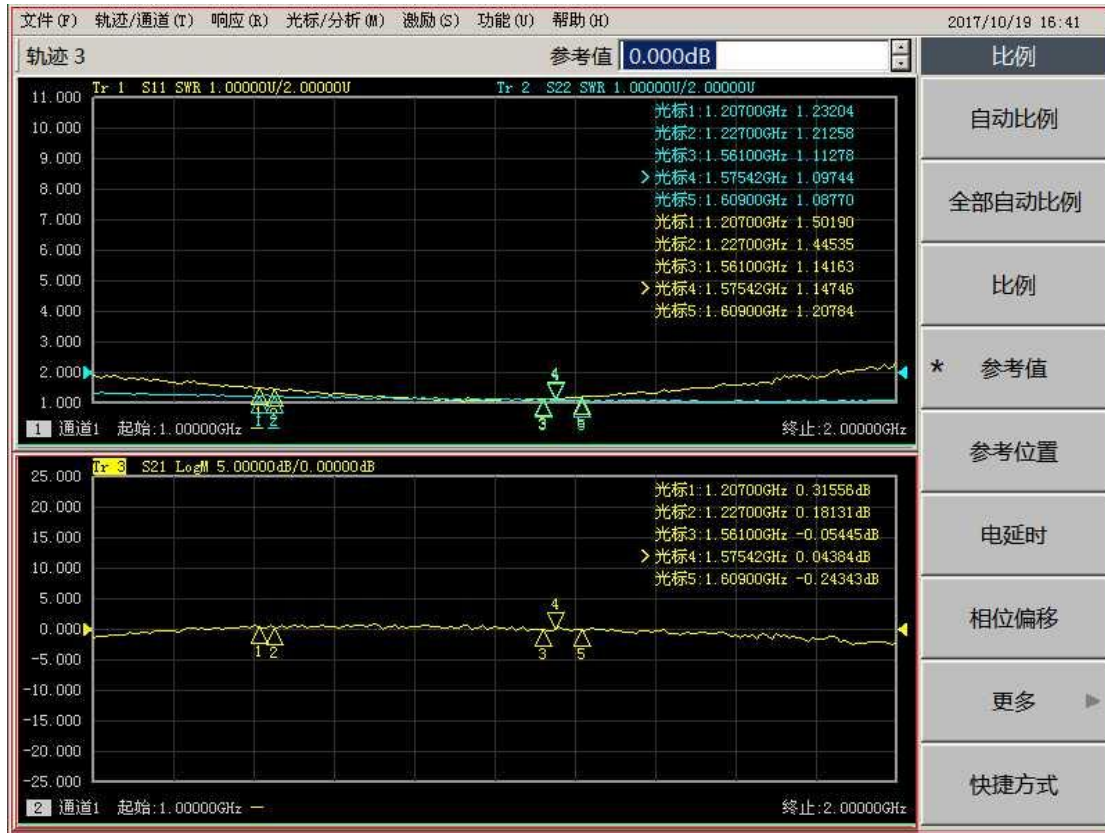

Order Informations And Available Options

MGS12i - A NM


Part Number:
Power port selection:
Blank(Standard)- Output port voltage comparison and selection

Gain Options:
Blank (Standard)-0dB
-Axx xx=01-21. Desired Gain Level
A-Active, 21dB gain

Connectors Output
Blank (Standard)-N Female
-NF N Female -NM N Male
-SF SMA Female -SM SMA Male
-TF TNC Female -TM TNC Male
-BF BNC Female -BM BNC Male

Please contact us for more configurations and application supports. Email: Sales@gemsnav.com.

Mechanical

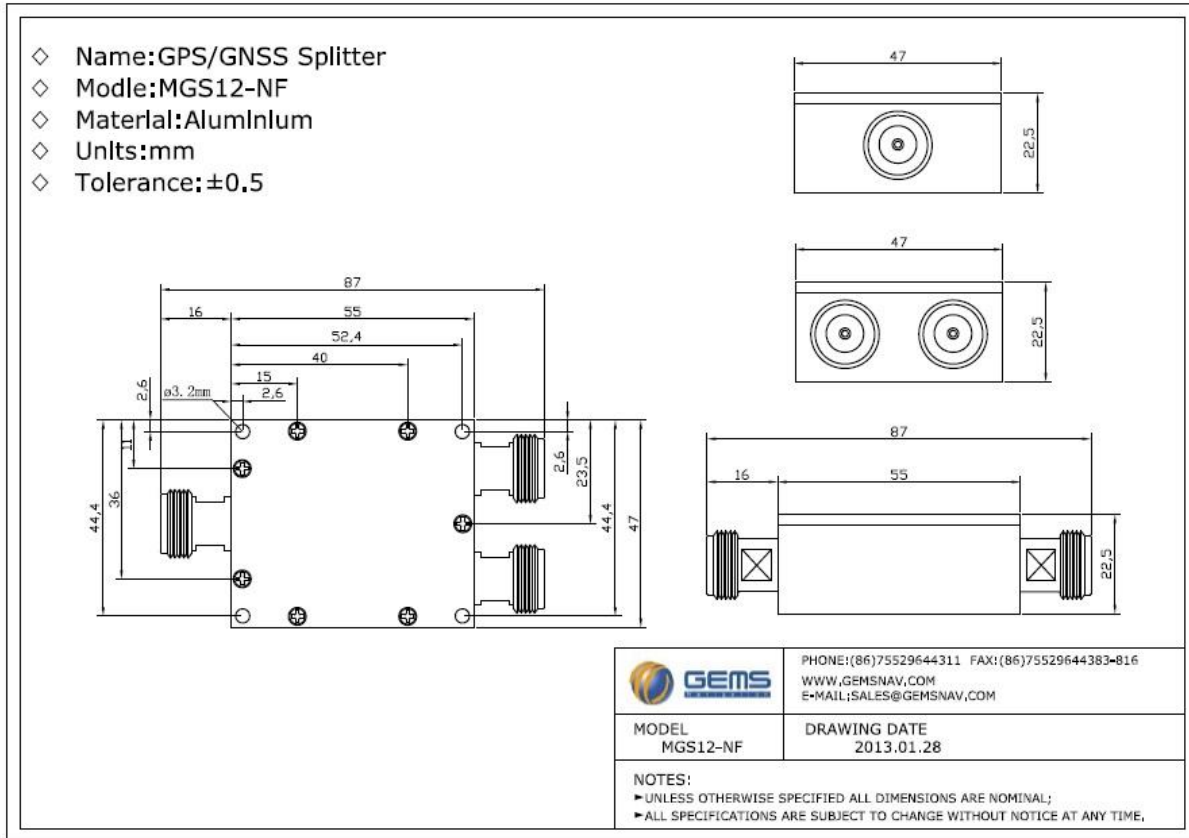

Frequency reference table

| Global/Compass Navigation Satellite Systems (GNSS/CNSS) | 5 | | | | | 2 | | | | | 6/3 | | | 6 | | | 1 | | | | | | | | | | | | | | |
|---|---------|---------|----------|------|----------|-------------|------|------|------|------|--------|---------|------|------|--------|--------|------|------|------|---------|------|---------|------|------|------|------|------|------|------|--------|------|
| Frequency (MHz) | 1164 | 1176 | 1188 | 1192 | 1207 | 1215 | 1210 | 1227 | 1230 | 1245 | 1252 | 1250 | 1266 | 1268 | 1278 | 1290 | 1535 | 1540 | 1545 | 1550 | 1558 | 1558 | 1561 | 1563 | 1575 | 1587 | 1592 | 1602 | 1609 | 1616 | 2491 |
| GPS (USA) L1,L2,L2C,L5 | L5+/-12 | | | | | L2/L2C+/-12 | | | | | | | | | | L6+/-5 | | | | | | L1+/-12 | | | | | | | | | |
| Glonass (Russia) G1,G2 | | | | | | | | | | | G2+/-7 | | | | | | | | | | | | | | | | | | | G1+/-7 | |
| Galileo (European) L1,E1,E2,E5 (E5a,E5b),E6 | E5+/-15 | | E5a+/-12 | | E5b+/-12 | | | | | | | E6+/-12 | | | L6+/-5 | | | E2 | | L1+/-17 | | E1 | | | | | | | | | |
| Compass (Beidou 2,China) | | | B2+/-10 | | | | | | | | | B3+/-10 | | | | | | | | B1+/-2 | | | | | | | | | | | |
| Beidou 1 (China,Tx(LHCP)/Rx(RHCP)) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | L | S | |
| IRNSS (India) | | L5+/-15 | | | | | | | | | | | | | | | | | | | | L1+/-12 | | | | | | | | S+/-15 | |
| OmiStar | | | | | | | | | | | | | | | | O+/-14 | | | | | | | | | | | | | | | |